ceado.

Rev Steel

Designing Flavor.

The ideal grinder for espresso blends that provides a **great balance between body** and **flavor clarity.**

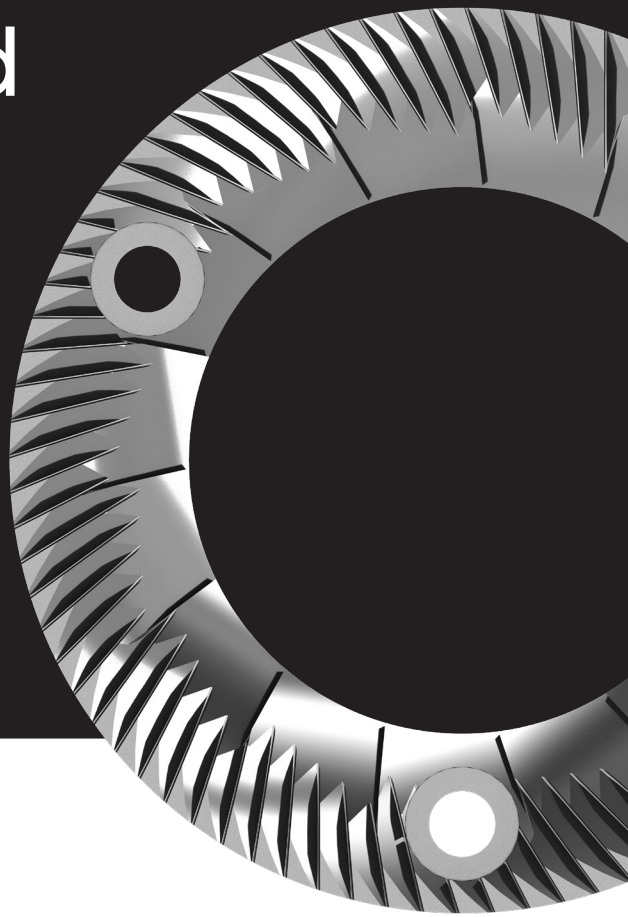

C83
83 mm steel flat burrs
with lifespan of 900 kg

Particle Size Distribution of Rev Steel

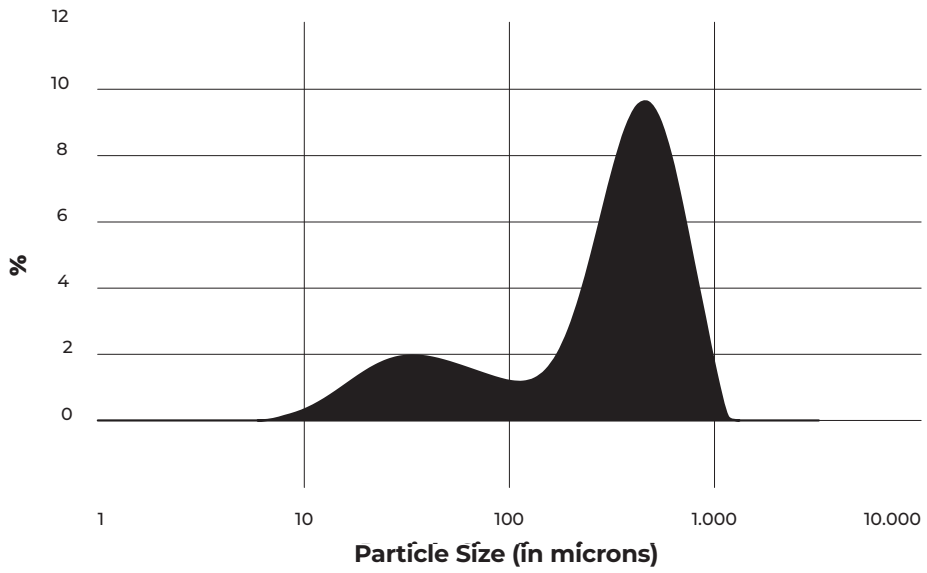

Weight Adjustment Module

Consistent weight aids in building and monitoring flavour recipes. The Rev Series feature an **interchangeable weight module**, that can be mounted in under two minutes, even post grinder installation.

WAM Module

PFA Module

Grounds Temperature Management

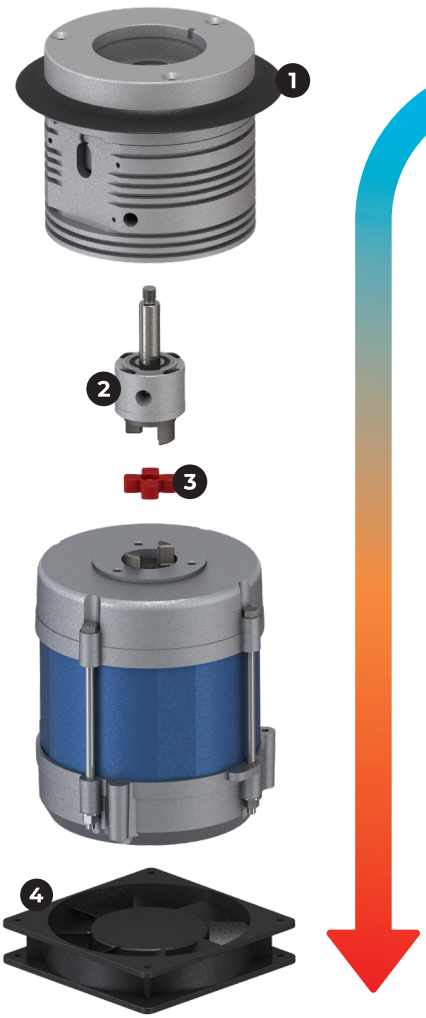

Stable and **low coffee grounds temperature** is key for consistent flavor extraction.

1. **2.5 kg heat sink** around the burrs to constantly remove large amounts of heat.
2. **Shaft** separates burrs from motor to prevent heat transmission.
3. **Insulation** to prevent heat transmission through the shaft.
4. **Active internal airflow management** to support temperature stability at any pace.

Peak Hour

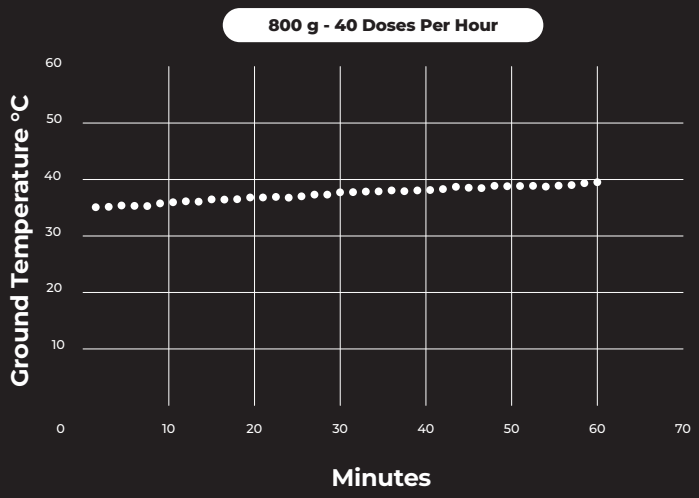

Stress Test

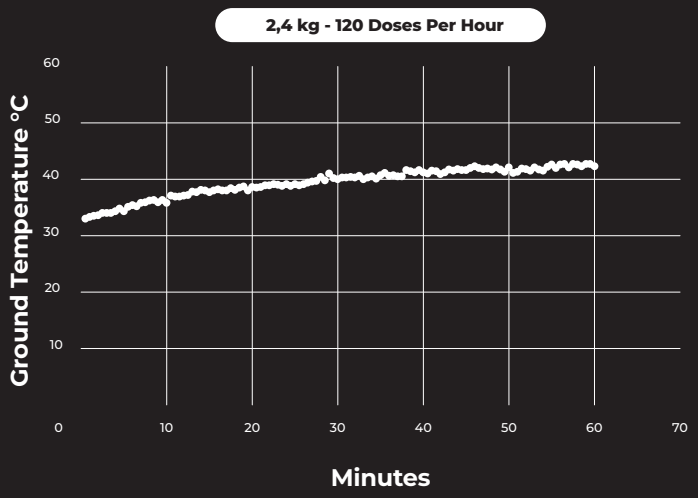

Steady Lock

The grinder features a counteracting system that **expands in the opposite direction** of the burrs, neutralizing the effect of heat expansion. This ensures a consistent particle size at any pace, preserving the same flavor profile.

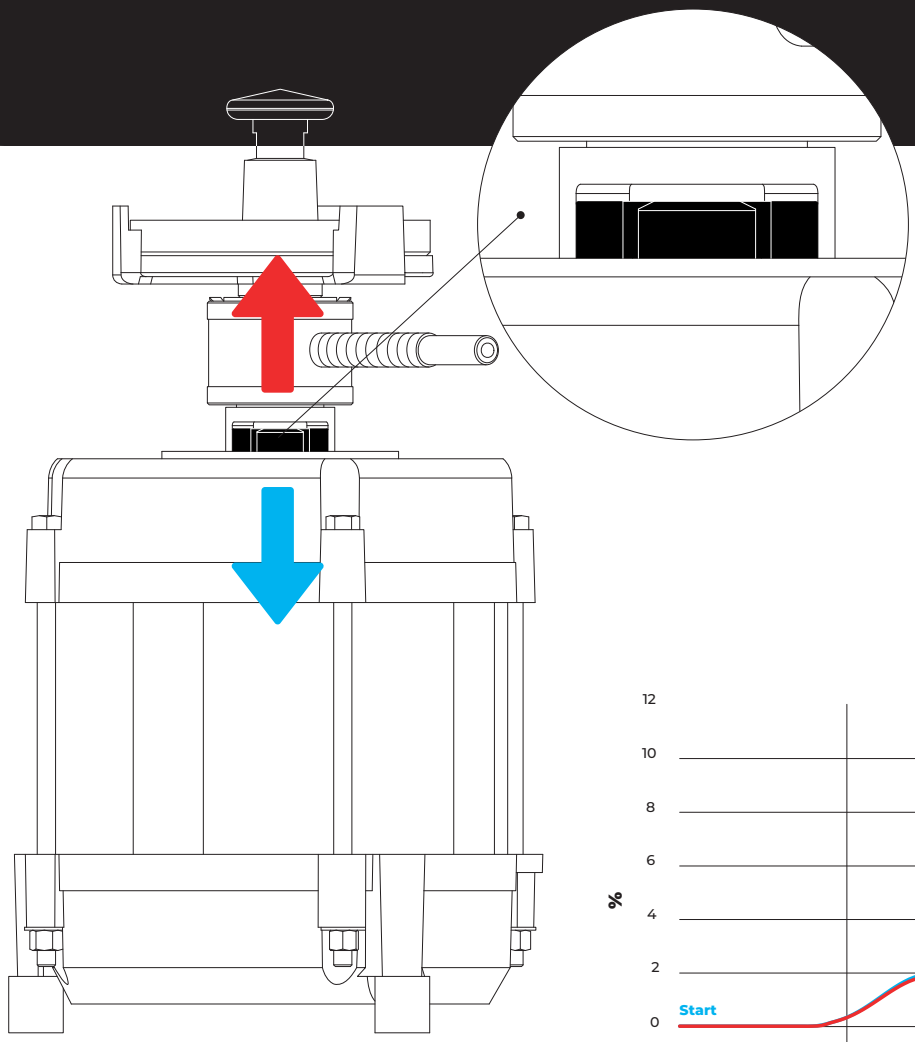

Peak Hour
Granulometry Consistency

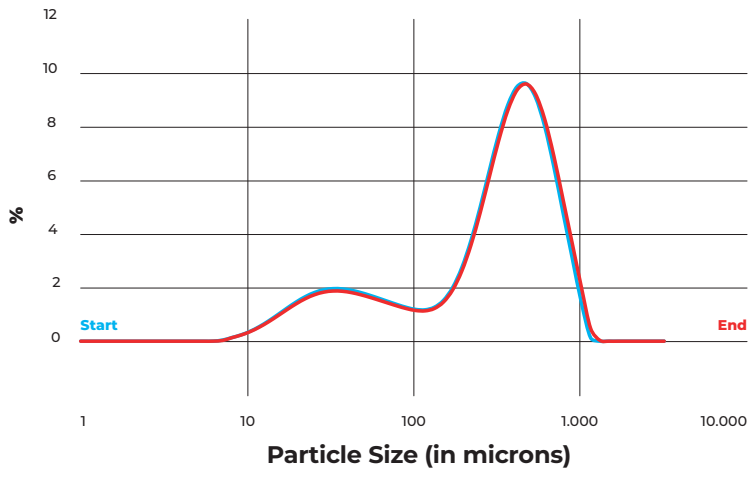

Noise Reduction

Grinder built to **prevent vibration transmission** and **noise emissions**.

1. **2.5 kg grind chamber** for higher noise insulation.
2. **Rubber rings** to reduce noise propagation.
3. **Motor separated from burrs** to prevent vibration transmission.
4. Motor mounted on **suspension system** reduces vibration emission.

Advanced Leveling Intelligent Grinding Nexus

Align

High-precision **stepless adjustment with display** for a digital, intuitive, and quick reading of the grind setting.

Cleaning has never been easier.

Burrs are easy to clean and inspect as it takes only **3 screws** to remove the top of the grind chamber. No grind re-adjustment is needed after cleaning.

Removable Chute

It only takes **few seconds and a screwdriver** to loosen the safety screw and extract the chute along with the metal flap for cleaning. Putting it back is as easy: **four guides** quickly bring it back to the correct position with no chance of error.

Removable Air Filter

To prevent dust and dirt entering the inner parts of the grinder, an air filter is installed behind the air suction grid. A **cleaning reminder** periodically appears on display.

The user interface is designed to be state-of-the-art, ensuring **intuitive use** for all.

Scroll Down Menu

Customizable Dose Layout

User Interface

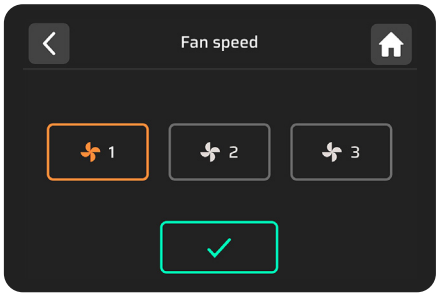

Programmable Air Flow

Maintenance Alerts

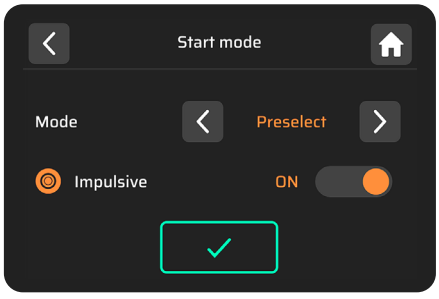

Five Grinding Activation Modes

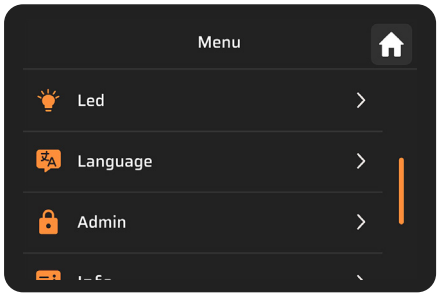

General Settings

- Ground temperature stability
- Weight precision
- Granulometry consistency

Same flavor for everyone.

Ceado original burrs
C83

© Ceado srl - All Rights Reserved - 02/2025

Rev Steel

ø 83 flat burrs

Align · Steady Lock · Gtm · WAM

Technical data

Voltage - Power	220-240 V · 50-60 Hz / 500 W
	110-120 V · 60 Hz / 5 A
Rpm 50 Hz / 60 Hz	1480 / 1700 rpm
Average Output (g/s)	4 (50 Hz) / 5 (60 Hz)
Net weight	14.4 kg
Gross weight	16.2 kg
Dimensions	200 x 270 x 590h mm
Burrs	**C83** ø 83 flat burrs*
Hopper	Approximately 1600 g
Dose setting	Digital with grind reference on display
Display	Multifunction Touch
Noise	66 dB
Colors	

***Red speed burrs available.**

Rev Steel Webpage